

advanced processing  
inca



## polymer processor inca 70

The **HEIGHTS Inca 70 Polymer Processor** is a new and innovative processor with clean crisp design lines which brings elegance and style to the Lithographic processor market, whilst retaining the robustness and durability associated with HEIGHTS processors.

This processor will provide a solution for those customers requiring high quality photopolymer CTP processing applications and is compatible with most plates on the market.

The HEIGHTS Inca 70 Polymer Processor incorporates all these features within an extremely compact footprint.

### Features

Six-Stage Processing

Integrated Developer Chiller as Standard

Unique Dry-Drive System

Energy and Water Saving Features

Easy Cleaning Access

Compact Design

Robust Engineering

State-of-the-Art Control System




H E I G H T S

# Technical Data



<b>Maximum Plate Width</b>	<b>Plate Input Height</b>
680mm (26.7")	940 - 1055mm (37 - 41.5")
<b>Minimum Plate Length</b>	<b>Dimension (LxWxH)</b>
254mm (10.0")	1628 x 1095 x 1350-1465mm (64.1 x 41.5 x 53 - 57.7")
<b>Plate Thickness</b>	<b>Machine Weight</b>
0.15 - 0.30mm (0.006 - 0.012")	470 kg (1036lbs)
<b>Plate Transport Speed</b>	<b>Recommended Room Temp.</b>
500 - 2000mm/min (19.68 to 78.7") @ 10 to 40 sec Dip to Niip	18 to 29°C (64.4 to 84.4°F)
<b>Pre-Wash Tank Capacity</b>	<b>Noise</b>
19.4 Litre (5.13 US Gallons)	Less than 70 dB(A)
<b>Developer Tank Capacity</b>	<b>Electrical Supply</b>
23.6 Litres (6.23 US Gallons)	220-240VAC 1 Phase + Neutral + PE 28A /Phase - 50/60Hz 220-240VAC 2W + PE 28A /Phase - 60Hz 380-480VAC 3P + Neutral + PE 16A/Phase - 50/60Hz  Please specify power requirements with your order
<b>Rinse Tank Capacity</b>	
19.8 Litres (5.23 US Gallons)	
<b>Finisher Tank</b>	
2.9 Litres (0.77 US Gallons)	

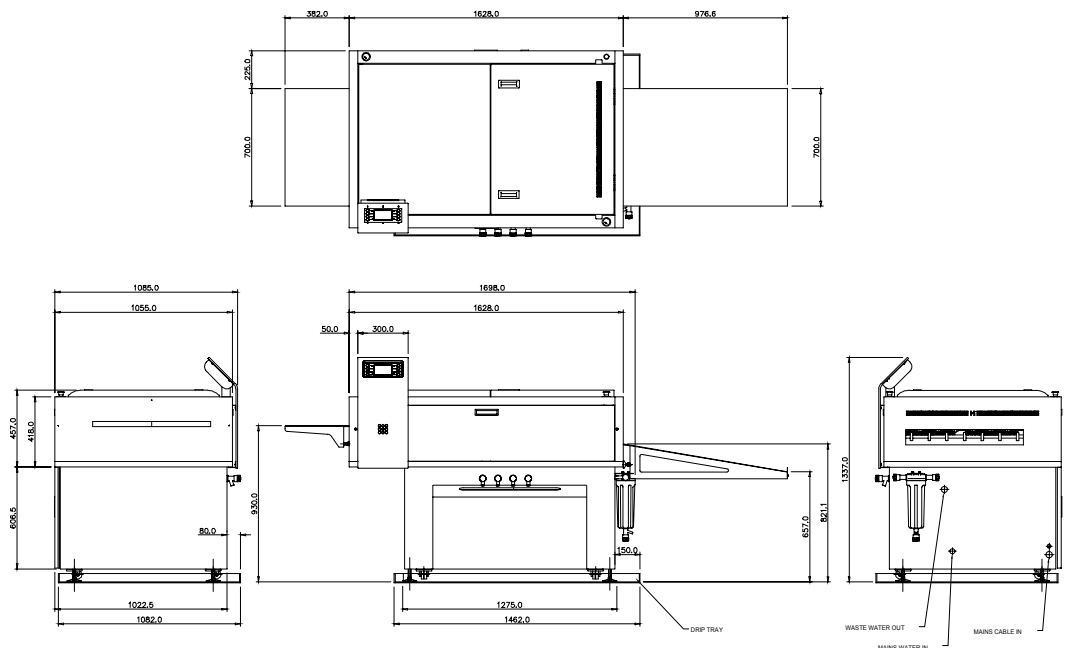

Heights UK Ltd  
Wainstalls, Halifax. West Yorkshire. HX2 7TJ United Kingdom  
tel. +44 (0) 1422 240914 fax. +44 (0) 1422 240589  
email. info@heights-uk.com



All trademarks are the copyright of their respective owners and their use in this publication is acknowledged and recognized. Specification liable to change without notice.